


Diagramme de la structure du produit



1. HR caméra
2. Micro
3. Chevalet
4. USB 2.0

Etapes à suivre pour l'installation

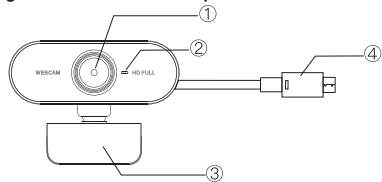

1. Ouvrir le support de la caméra et la régler face à vous.



2. Refermer le support afin de la faire tenir correctement.



3. Insérer le câble USB dans l'interface USB de l'ordinateur et laisser vous guider.

Spécifications techniques

Spécifications Webcam			
Connexion	Brancher et utiliser	Longueur du câble USB	>140 cm
Format photo	BMP	Résolution	1920x1080
Type de capteur	CMOS	Interface	USB2.0
Contrôle de scintillation	50Hz	Microphone	Incorporé
Meilleure distance d'image	90 cm	Dimensions	70x50.7x44 m
Support de l'équipement	Support pour Windows 2000, XP, XP2, Vista, Win7, Win8, Win10, Mac OS, Linux		

Accessoires


Webcam



Instructions



Product structure diagram

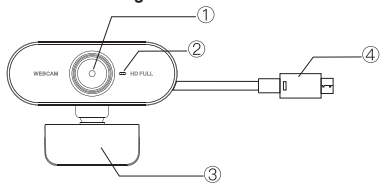

1. HD camera
2. MAC hole
3. Trestle
4. USB 2.0

Installation steps



1. Turn on the Camera Mount and point the camera toward the front of the display.



2. Press down on the Camera Mount and snap the rear end of the screen mount to the back of the screen.



3. Plug the USB data cable into the USB interface of the computer.

Detail parameter

Webcam parameters			
Driving type	plug&play (no driver)	USB line length	>140 cm
Photo format	BMP	Resolving power	1920x1080
Sensor type	CMOS	Interface type	USB2.0
Scintillation control	50Hz	Microphone	Incorporé
Best imaging distance	90 cm	Product size	70x50.7x44 m
Support device	Support mainstream computer Windows 2000, XP, XP2, Vista, Win7, Win8, Win10, Mac OS, Linux operating system		

Product accessories

Webcam



Instructions

